

V. DMX function:


Channel	Value	Function
CH1	0-255	Main dimming from dark to bright
CH2	0-255	Control strobe from slowly to quickly
CH3	0-50	DMX channel control
	51-100	Color change by Snapping
	101-150	Color change by Fade
	151-200	Color change by Pulse Variable
	201-255	Sound control
CH4	0-255	The speed of function from slowly to quickly
CH5	0-255	R dimming from dark to bright
CH6	0-255	G dimming from dark to bright
CH7	0-255	B dimming from dark to bright
CH8	0-255	w dimming from dark to bright

Important notice:

- ✧ Before open the LED par light and if you want to do the repair work, please make sure the power source is at the separation condition.
- ✧ Unceasingly carries on the product improvement about our company the policy, in this instruction booklet carries the data will have the possibility to be able to change in the future, when no longer separate notice change matters concerned. Our company retains when the product improvement changes the related specification the authority. This instruction booklet publisher cannot be responsible regarding this instruction booklet in information accuracy, also cannot the related consequence which causes regarding these information be responsible.

LED PAR 70

MJ-3114

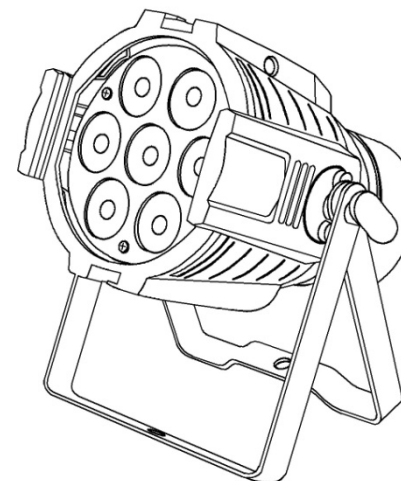

User Manual

=====PROFESSIONAL LED LIGHTING=====

Thank you for choosing our Mini LED par light. For the sake of your safety, Please read and follow these instructions carefully and keep this manual in a safe place for future reference.

I. Installation: .

1. In order to secure the safe installation of the light, always use it in the well-ventilated environment.
2. Always keep this light with a safe distance from any flammable materials.
3. Never install, dismantle and maintain this light when it is powered; and all work aforesaid must be conducted by professionals.
4. The packing list of this light is as follows:
 - 1) Light -----1pcs
 - 2) User Manual-----1pcs

II. Effect:

1. This light operation is very simple, Attractive appearance, Humanized design, Dim without flicker and shake, Energy-efficient, Durable. It is suitable for photography, television stations, stage, dance hall, KTV, bar, evening show.
2. The program of this light can automatically operate, sound, accept DMX512 signal control and be connected for use.

III. Menu display function table:

Please press “**Menu**” button to choose function , and press “**Enter**” button to confirm.

No.	Display	Function
1	d001	d001—d512 (8 channel) press “UP” and “Down” button change the DMX address
2	CC50	CC01—CC99 (Color change by Snapping), press “UP” and “Down” button change the snapping speed

3	CP50	CP01—CP99 (Color change by Fade), press “UP” and “Down” button change the Fade speed
4	DE50	DE01--DE99 (Color change by RG,RB,RW,BG, BW,RGB.....) press “UP” and “Down” button change the speed
5	BE50	Sound mode
6	R000	R000—R255 (Red dimming by hand)
7	G000	G000—G255 (Green dimming by hand)
8	B000	B000—B255 (Blue dimming by hand)
9	W000	W000—W255 (White dimming by hand)

IV. Technical Parameters:

Voltage: AC100-240V, 50Hz/60Hz

Power Consumption: 70 Watts

LED: 7pcs 4in1 LED

LED Power: 10 Watts (x 7pcs)

LED Current: 500mA / 1 pc

LED Beam Angle: 25°

LED Lifetime: 80,000-100,000 hours

Possible Color Combinations: RGBW color mixing

Dimming: 0-100% with regulated constant color control

Strobe: 10 Flashes per second (any color)

Operation Modes: DMX512, Manual, Sound, Internal Program, Master-slave

DMX Control: 8 Channels

Control Panel: Digital 4 Character Alphanumeric

Maximum Ambient Temperature: 40° C

Gross Weight: 2 kg

Package Size: 20.5 x 20.5 x 25.5cm